
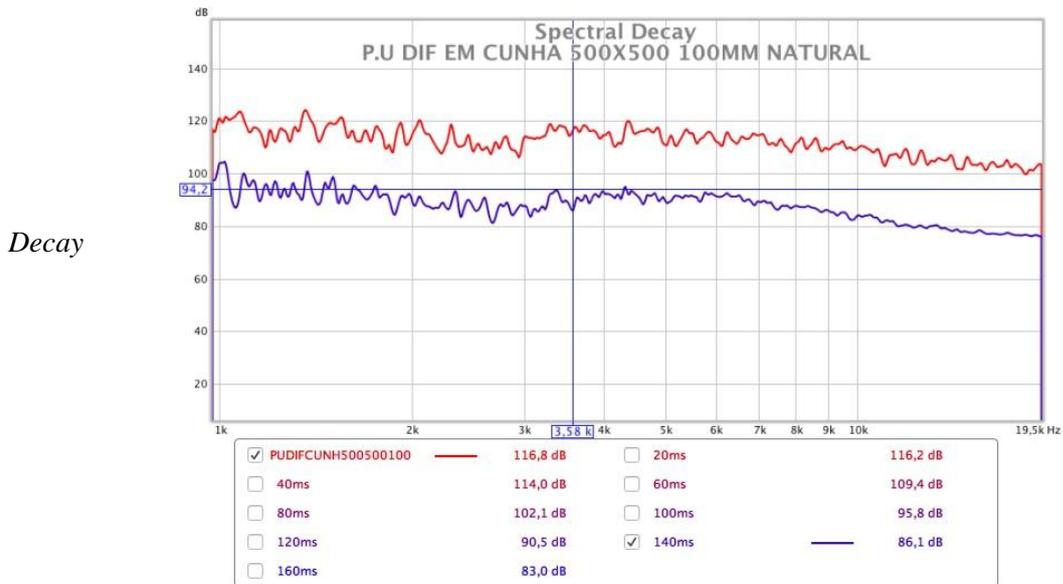


P.U DIF EM CUNHA 500X500 100MM NATURAL

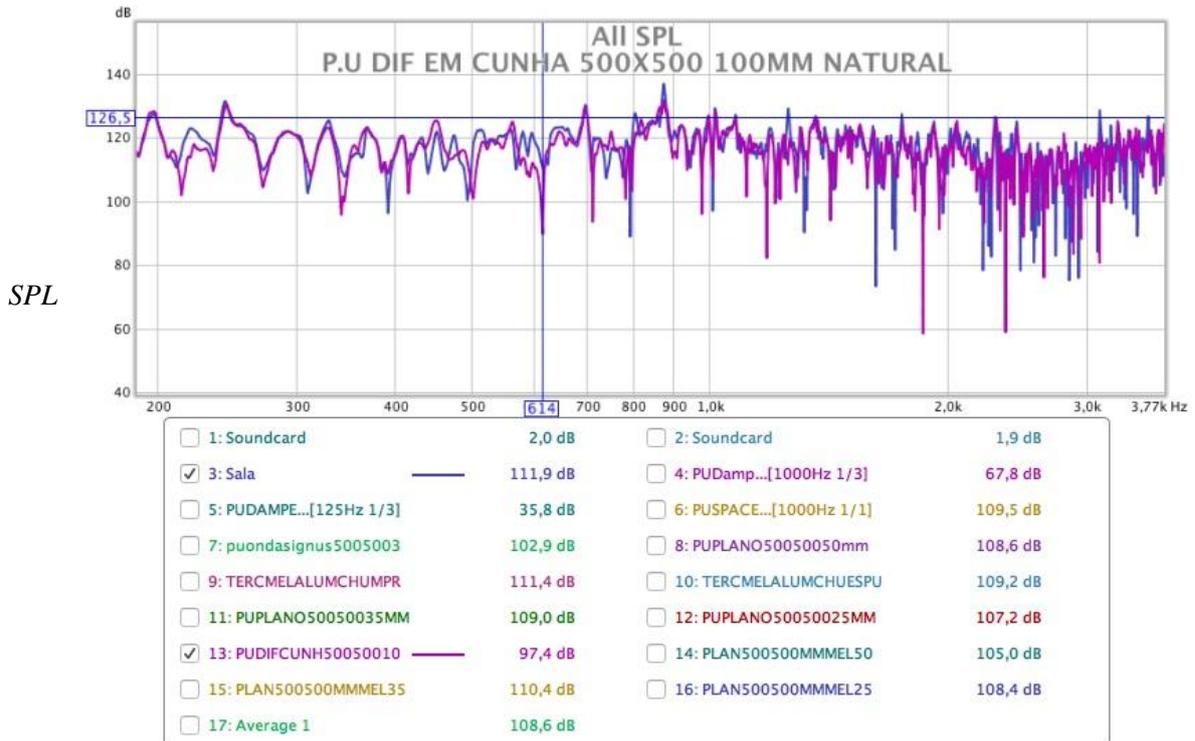

125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	NRC
0.32	0.72	0.91	1.01	1.10	1.02	1.02

Faixa de frequência efetiva de absorção acima de 614Hz a 3,93KHz.